


embraco  
*Nidec*

# CONDENSING UNITS

## EUROPE HFC RANGE

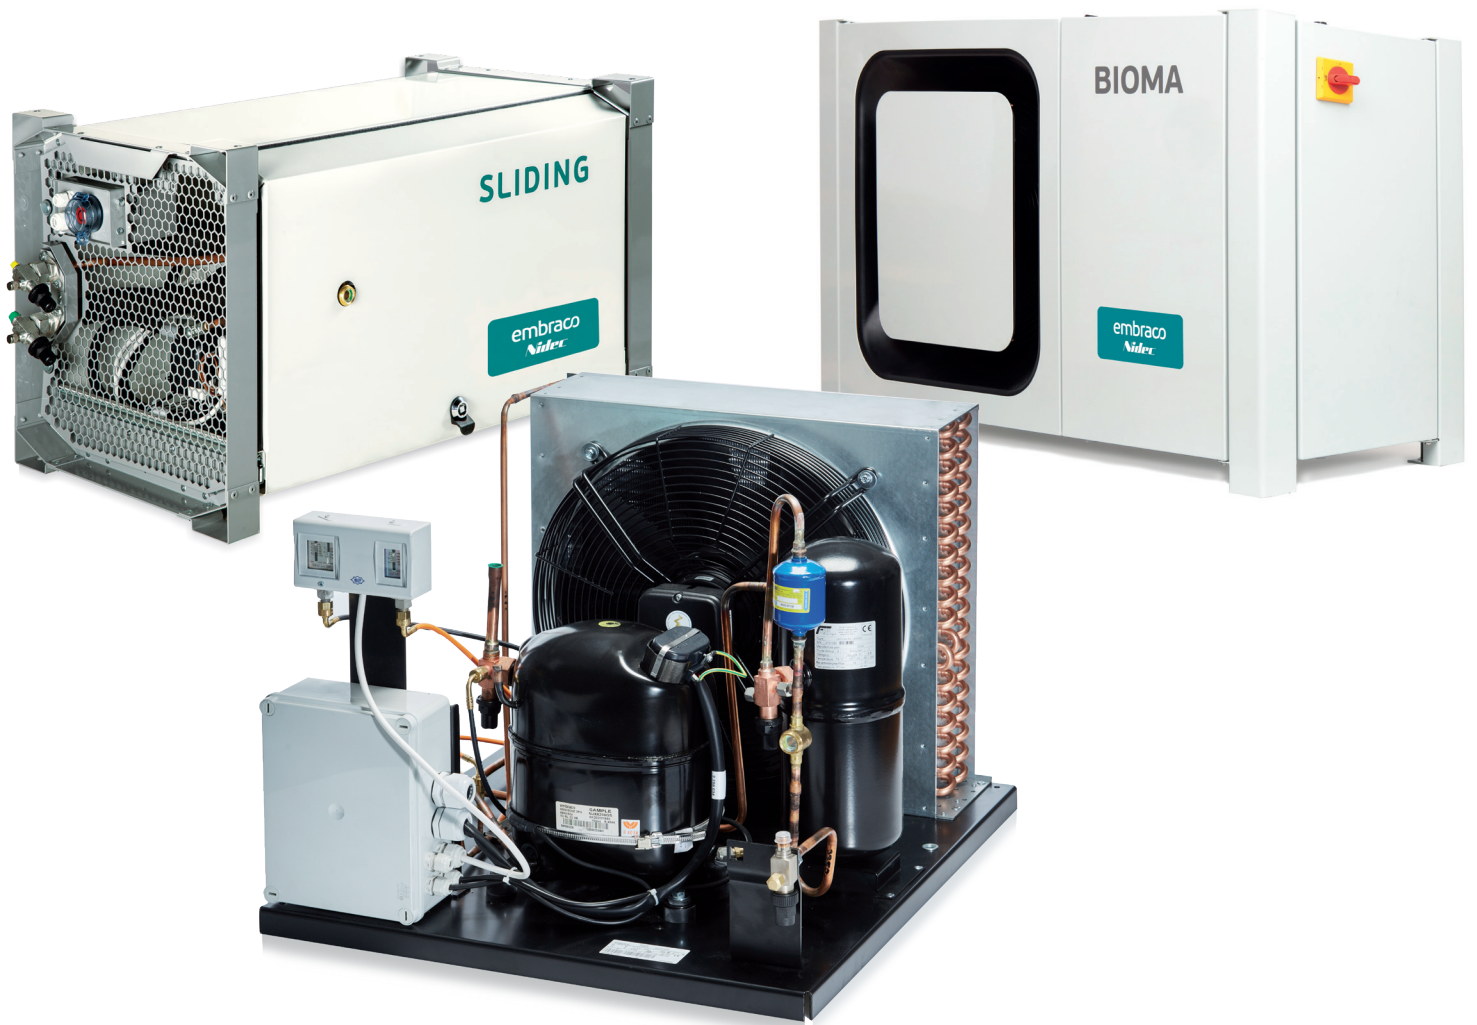

Maximum energy optimization from production to product.

FAMILIES:  
**BIOMA • SLIDING • UNHOUSED**

# BIOMA range: the silent units



**INNOVATIVE DESIGN**

- Hidden fan - Stylish design for a new experience
- Unique airflow management
- Mini channel condenser - 40% less refrigerant charge

**PERFORMANCE AND OPTIMIZED SOUND LEVEL**

- Robust design to absorb vibration and noise
- Sound level as low as 28dB (A)
- Acoustic jacket on scroll compressors
- Fan speed controller as standard
- 5 faces insulated with acoustic foam

**ACCESSIBILITY**

- 3 door access on hinges - ¼ turn door lock to open/close
- Direct access to components you can set or change
- Direct access to fan and condenser



**COMPACTNESS**

- Optimized dimensions to reduce surface area (<math><0.6\text{m}^2</math>)
- 1 fan design for all housing sizes
- Stackability: Unique offer to stack units from different dimensions

**FLEXIBILITY**

- Multi-Refrigerant platform: R404A, R449A, R452A, R134a, R513A
- Fully equipped electrical box
  - Condenser treatment against corrosive environment
- Available with the complete range of Embraco hermetic and scroll compressors

## HIGH EFFICIENCY RANGE: FROM 0.5 kW TO 10 kW

0,5 kW **LBP R404A - R449A - R452A** 4 kW

0,7 kW **MBP R134a - R513A** 6 kW

0,7 kW **MBP R404A - R449A - R452A** 10 kW

Test conditions: rated point EN13215 MBP-LBP

## MODELS AND PERFORMANCE

| MEDIUM TEMPERATURE  |                    | R452A |                    | R449A |       | Max Abs Power | Dimensions (mm) |     |     | Weight | I nom | Fan      |     | Liquid Receiver | Connect Diam. (SAE) |                        | SP 10m |                 |             |            |        |
|---|--------------------|-------|--------------------|-------|-------|---------------|-----------------|-----|-----|--------|-------|----------|-----|-----------------|---------------------|------------------------|--------|-----------------|-------------|------------|--------|
| MODELS  | Refrig. Power (kW) |       | Refrig. Power (kW) |       | +10°C |               | H               | W   | D   |        |       | Net (kg) | (A) |                 | Number              | AF (m <sub>3</sub> /h) |        | dm <sub>3</sub> | Suction (") | Liquid (") | dB (A) |
|   | -10°C              | 0°C   | -10°C              | 0°C   |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| <b>Compressor 230V - 1ph - 50Hz - Fan 230V - 1ph - 50Hz</b> |                    |       |                    |       |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| UP-NEU6212GK-EAE00  | 0,83               | 1,21  | 0,81               | 1,21  | 0,61  | 600           | 982             | 484 | 54  | 3,1    | 1     | 1695     | 1,6 | 3/8             | 1/4                 | 28                     |        |                 |             |            |        |
| UP-NEU6215GK-EAE00  | 1,10               | 1,57  | 1,09               | 1,59  | 0,84  | 600           | 982             | 484 | 54  | 2,8    | 1     | 1695     | 1,6 | 3/8             | 1/4                 | 28                     |        |                 |             |            |        |
| UP-NT6222GK-EAE00   | 1,32               | 1,87  | 1,31               | 1,90  | 1,12  | 600           | 982             | 484 | 60  | 4,3    | 1     | 1695     | 1,6 | 1/2             | 3/8                 | 29                     |        |                 |             |            |        |
| UP-NT6224GK-EAE00   | 1,67               | 2,42  | 1,63               | 2,40  | 1,23  | 600           | 982             | 484 | 62  | 4,5    | 1     | 1523     | 2,3 | 1/2             | 3/8                 | 29                     |        |                 |             |            |        |
| UP-NT6226GK-EAE00   | 1,81               | 2,62  | 1,80               | 2,66  | 1,34  | 600           | 982             | 484 | 63  | 4,8    | 1     | 1523     | 2,3 | 1/2             | 3/8                 | 29                     |        |                 |             |            |        |
| UP-NJ9232GK-EAE00   | 1,93               | 2,86  | 2,04               | 3,07  | 1,56  | 600           | 982             | 484 | 69  | 5,7    | 1     | 1523     | 2,3 | 5/8             | 3/8                 | 30                     |        |                 |             |            |        |
| UP-NTU6238GKV-EAE00   | 2,24               | 3,20  | 2,27               | 3,29  | 1,52  | 600           | 982             | 484 | 66  | 5,6    | 1     | 1523     | 2,3 | 5/8             | 3/8                 | 30                     |        |                 |             |            |        |
| UP-SE6015GK-EAE00   | 3,57               | 5,08  | 3,73               | 5,21  | 2,56  | 708           | 1082            | 490 | 91  | 8,5    | 1     | 2673     | 3,9 | 5/8             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6018GK-EAE00   | 4,26               | 6,05  | 4,45               | 6,21  | 2,98  | 708           | 1082            | 490 | 91  | 10,2   | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6021GK-EAE00   | 4,74               | 6,69  | 4,96               | 6,89  | 3,42  | 708           | 1082            | 490 | 92  | 11,6   | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| <b>Compressor 400V - 3ph - 50Hz - Fan 400V - 3ph - 50Hz</b> |                    |       |                    |       |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| UP-NJ9232GS-EAE00   | 2,04               | 3,05  | 2,04               | 3,07  | 1,61  | 600           | 982             | 484 | 69  | 2,1    | 1     | 1523     | 2,3 | 5/8             | 3/8                 | 30                     |        |                 |             |            |        |
| UP-NJ9238GS-EAE00   | 2,46               | 3,51  | 2,48               | 3,57  | 1,94  | 600           | 982             | 484 | 69  | 2,9    | 1     | 1523     | 2,3 | 5/8             | 3/8                 | 30                     |        |                 |             |            |        |
| UP-NJ6250GS-EAE00   | 3,26               | 4,61  | 3,27               | 4,72  | 2,48  | 708           | 1082            | 490 | 77  | 3,4    | 1     | 2673     | 3,9 | 5/8             | 3/8                 | 34                     |        |                 |             |            |        |
| UP-SE6015GS-EAE00   | 3,58               | 5,08  | 3,73               | 5,22  | 2,51  | 708           | 1082            | 490 | 88  | 3,2    | 1     | 2673     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6018GS-EAE00   | 4,27               | 6,07  | 4,46               | 6,22  | 2,83  | 708           | 1082            | 490 | 89  | 4,7    | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6021GS-EAE00   | 4,76               | 6,71  | 4,98               | 6,91  | 3,23  | 708           | 1082            | 490 | 90  | 4,9    | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6026GS-EAE00   | 6,28               | 8,97  | 6,53               | 9,18  | 3,86  | 1005          | 1277            | 538 | 126 | 6,2    | 1     | 5195     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |
| UP-SE6030GS-EAE00   | 6,99               | 9,95  | 7,30               | 10,20 | 4,34  | 1005          | 1277            | 538 | 127 | 6,6    | 1     | 5195     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |
| UP-SE6036GS-EAE00   | 8,73               | 12,46 | 9,08               | 12,74 | 5,05  | 1005          | 1277            | 538 | 127 | 7,6    | 1     | 4739     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |
| UP-SE6043GS-EAE00   | 10,08              | 14,29 | 10,53              | 14,68 | 6,24  | 1005          | 1277            | 538 | 129 | 8,6    | 1     | 4739     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |

| MEDIUM TEMPERATURE  |                    | R134a |                    | R513A |       | Max Abs Power | Dimensions (mm) |     |     | Weight | I nom | Fan      |     | Liquid Receiver | Connect Diam. (SAE) |                        | SP 10m |                 |             |            |        |
|---|--------------------|-------|--------------------|-------|-------|---------------|-----------------|-----|-----|--------|-------|----------|-----|-----------------|---------------------|------------------------|--------|-----------------|-------------|------------|--------|
| MODELS  | Refrig. Power (kW) |       | Refrig. Power (kW) |       | +10°C |               | H               | W   | D   |        |       | Net (kg) | (A) |                 | Number              | AF (m <sub>3</sub> /h) |        | dm <sub>3</sub> | Suction (") | Liquid (") | dB (A) |
|   | -10°C              | 0°C   | -10°C              | 0°C   |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| <b>Compressor 230V - 1ph - 50Hz - Fan 230V - 1ph - 50Hz</b> |                    |       |                    |       |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| UP-NEU6214Z-EA00  | 0,87               | 1,33  | 0,90               | 1,33  | 0,78  | 600           | 982             | 484 | 54  | 2,9    | 1     | 1695     | 1,6 | 3/8             | 1/4                 | 28                     |        |                 |             |            |        |
| UP-NJ6220ZZ-EA00  | 1,16               | 1,74  | 1,18               | 1,76  | 1,17  | 600           | 982             | 484 | 56  | 6,2    | 1     | 1695     | 1,6 | 1/2             | 1/4                 | 29                     |        |                 |             |            |        |
| UP-NJ6226Z-EA00   | 1,48               | 2,14  | 1,51               | 2,16  | 1,47  | 600           | 982             | 484 | 56  | 5,6    | 1     | 1695     | 1,6 | 1/2             | 1/4                 | 29                     |        |                 |             |            |        |
| UP-SE6015GK-EAE00   | 2,19               | 3,35  | 2,29               | 3,43  | 1,54  | 708           | 1082            | 490 | 91  | 5,3    | 1     | 2673     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6018GK-EAE00   | 2,61               | 3,99  | 2,73               | 4,09  | 1,78  | 708           | 1082            | 490 | 91  | 6,2    | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6021GK-EAE00   | 2,95               | 4,48  | 3,07               | 4,58  | 2,01  | 708           | 1082            | 490 | 92  | 6,9    | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| <b>Compressor 400V - 3ph - 50Hz - Fan 400V - 3ph - 50Hz</b> |                    |       |                    |       |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| UP-NJ6226ZX-EA00  | 1,61               | 2,26  | 1,63               | 2,26  | 1,40  | 600           | 982             | 484 | 56  | 2,2    | 1     | 1695     | 1,6 | 1/2             | 1/4                 | 29                     |        |                 |             |            |        |
| UP-SE6015GS-EAE00   | 2,19               | 3,35  | 2,29               | 3,44  | 1,51  | 708           | 1082            | 490 | 88  | 2,3    | 1     | 2673     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6018GS-EAE00   | 2,62               | 3,99  | 2,73               | 4,10  | 1,69  | 708           | 1082            | 490 | 89  | 3,7    | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6021GS-EAE00   | 2,95               | 4,49  | 3,07               | 4,59  | 1,91  | 708           | 1082            | 490 | 90  | 3,8    | 1     | 2545     | 3,9 | 3/4             | 1/2                 | 33                     |        |                 |             |            |        |
| UP-SE6026GS-EAE00   | 3,81               | 5,82  | 3,99               | 6,00  | 2,36  | 1005          | 1277            | 538 | 126 | 5      | 1     | 5195     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |
| UP-SE6030GS-EAE00   | 4,29               | 6,54  | 4,48               | 6,72  | 2,61  | 1005          | 1277            | 538 | 127 | 5,4    | 1     | 5195     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |
| UP-SE6036GS-EAE00   | 5,28               | 8,06  | 5,52               | 8,30  | 3,08  | 1005          | 1277            | 538 | 127 | 5,7    | 1     | 4739     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |
| UP-SE6043GS-EAE00   | 6,19               | 9,42  | 6,45               | 9,65  | 3,73  | 1005          | 1277            | 538 | 129 | 6,4    | 1     | 4739     | 6   | 7/8             | 5/8                 | 36                     |        |                 |             |            |        |

| LOW TEMPERATURE   |                    | R452A |                    | R449A |       | Max Abs Power | Dimensions (mm) |     |     | Weight | I nom | Fan      |     | Liquid Receiver | Connect Diam. (SAE) |                        | SP 10m |                 |             |            |        |
|---|--------------------|-------|--------------------|-------|-------|---------------|-----------------|-----|-----|--------|-------|----------|-----|-----------------|---------------------|------------------------|--------|-----------------|-------------|------------|--------|
| MODELS  | Refrig. Power (kW) |       | Refrig. Power (kW) |       | -10°C |               | H               | W   | D   |        |       | Net (kg) | (A) |                 | Number              | AF (m <sub>3</sub> /h) |        | dm <sub>3</sub> | Suction (") | Liquid (") | dB (A) |
|   | -35°C              | -30°C | -35°C              | -30°C |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| <b>Compressor 230V - 1ph - 50Hz - Fan 230V - 1ph - 50Hz</b> |                    |       |                    |       |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| UP-NT2180GK-EAE00   | 0,49               | 0,63  | -                  | -     | 0,99  | 600           | 982             | 484 | 65  | 2,4    | 1     | 1695     | 1,6 | 1/2             | 1/4                 | 29                     |        |                 |             |            |        |
| UP-NT2192GK-EAE00   | 0,52               | 0,68  | -                  | -     | 1,06  | 600           | 982             | 484 | 65  | 2,7    | 1     | 1695     | 1,6 | 1/2             | 3/8                 | 29                     |        |                 |             |            |        |
| UP-NT2212GK-EAE00   | 0,69               | 0,90  | -                  | -     | 1,32  | 600           | 982             | 484 | 65  | 3,7    | 1     | 1523     | 2,3 | 1/2             | 3/8                 | 29                     |        |                 |             |            |        |
| UP-SE2006GK-EAE00   | 1,18               | 1,46  | 1,21               | 1,51  | 1,68  | 708           | 1082            | 490 | 91  | 5,6    | 1     | 2673     | 3,9 | 3/4             | 3/8                 | 33                     |        |                 |             |            |        |
| UP-SE2008GK-EAE00   | 1,47               | 1,82  | 1,53               | 1,90  | 2,20  | 708           | 1082            | 490 | 91  | 7,2    | 1     | 2673     | 3,9 | 3/4             | 3/8                 | 33                     |        |                 |             |            |        |
| UP-SE2010GK-EAE00   | 1,70               | 2,10  | 1,77               | 2,19  | 2,63  | 708           | 1082            | 490 | 91  | 8,4    | 1     | 2673     | 3,9 | 3/4             | 3/8                 | 33                     |        |                 |             |            |        |
| <b>Compressor 400V - 3ph - 50Hz - Fan 400V - 3ph - 50Hz</b> |                    |       |                    |       |       |               |                 |     |     |        |       |          |     |                 |                     |                        |        |                 |             |            |        |
| UP-NJ2219GS-EAE00   | 1,02               | 1,34  | -                  | -     | 1,91  | 708           | 1082            | 490 | 69  | 2,3    | 1     | 2673     | 3,9 | 1/2             | 3/8                 | 34                     |        |                 |             |            |        |
| UP-SE2006GS-EAE00   | 1,18               | 1,46  | 1,21               | 1,51  | 1,67  | 708           | 1082            | 490 | 88  | 2,4    | 1     | 2673     | 3,9 | 3/4             | 3/8                 | 33                     |        |                 |             |            |        |
| UP-SE2008GS-EAE00   | 1,47               | 1,82  | 1,53               | 1,90  | 2,16  | 708           | 1082            | 490 | 88  | 2,7    | 1     | 2673     | 3,9 | 3/4             | 3/8                 | 33                     |        |                 |             |            |        |
| UP-SE2010GS-EAE00   | 1,70               | 2,10  | 1,77               | 2,20  | 2,56  | 708           | 1082            | 490 | 89  | 4,3    | 1     | 2673     | 3,9 | 3/4             | 3/8                 | 33                     |        |                 |             |            |        |
| UP-SE2012GS-EAE00   | 2,29               | 2,84  | 2,36               | 2,94  | 3,17  | 1005          | 1277            | 538 | 117 | 5,4    | 1     | 5195     | 6   | 7/8             | 1/2                 | 36                     |        |                 |             |            |        |
| UP-SE2014GS-EAE00   | 2,65               | 3,28  | 2,74               | 3,41  | 3,42  | 1005          | 1277            | 538 | 118 | 5,2    | 1     | 5195     | 6   | 7/8             | 1/2                 | 36                     |        |                 |             |            |        |
| UP-SE2017GS-EAE00   | 3,10               | 3,83  | 3,22               | 3,99  | 4,00  | 1005          | 1277            | 538 | 118 | 6,3    | 1     | 5195     | 6   | 7/8             | 1/2                 | 36                     |        |                 |             |            |        |
| UP-SE2020GS-EAE00   | 3,57               | 4,41  | 3,73               | 4,61  | 4,75  | 1005          | 1277            | 538 | 120 | 6,9    | 1     | 5195     | 6   | 7/8             | 1/2                 | 36                     |        |                 |             |            |        |



# SLIDING RANGE: smart & easy



## ACCESSIBILITY

- Simple opening with only one central lock
- External rotalock valves for suction and liquid for easier installation
- New electrical box for simplified wiring



## PERFORMANCE

- High efficiency compressor (on-off and scroll)
- Acoustic jacket on scroll compressors
- Fan speed controller (optional)



Multi refrigerant platform  
R404A, R449A, R452A, R134a, R513A



## HOUSING

- Access drawer renewed to all components needing to be set or changed
- Unique condenser air flow (longitudinal)
- Bigger size for more cooling capacity



## INNOVATIVE DESIGN

- Can be installed directly on the wall
- Stackable: unique possibility to stack units of different sizes without accessories
- Single fan solution for two sizes

## HIGH CAPACITY RANGE: FROM 0.5 kW TO 5 kW

0,5 kW LBP R404A - R449A - R452A 2 kW

0,7 kW MBP R134a - R513A 3 kW

0,7 kW MBP R404A - R449A - R452A 5 kW

Test conditions: EN13215, Ranking MBP-LBP



## MODELS AND PERFORMANCE

| MEDIUM TEMPERATURE<br>CONDENSING UNITS<br>MODELS | R452A                             |     | R449A                             |     | Max Power input<br>(W)<br>+10°C | Dimensions<br>(mm) |   |   | Weight<br>Net<br>(kg) | Inom<br>(A) | Fan                 |                                | Liquid<br>receiver<br>dm <sup>3</sup> | Connection<br>diameters |               |
|--|-----------------------------------|-----|-----------------------------------|-----|---------------------------------|--------------------|---|---|-----------------------|-------------|---------------------|--------------------------------|---------------------------------------|-------------------------|---------------|
|  | Cooling capacity<br>(W)<br>@+32°C |     | Cooling capacity<br>(W)<br>@+32°C |     |                                 | W                  | D | H |                       |             | Number<br>of fan(s) | Airflow<br>(m <sup>3</sup> /h) |                                       | Suction<br>(")          | Liquid<br>(") |
|  | -10°C                             | 0°C | -10°C                             | 0°C |                                 |                    |   |   |                       |             |                     |                                |                                       |                         |               |

### Compressor 230V-1ph-50Hz - Fan 230V-1ph-50Hz

|                  |      |      |      |      |      |     |     |     |      |     |   |      |     |     |     |
|------------------|------|------|------|------|------|-----|-----|-----|------|-----|---|------|-----|-----|-----|
| UDNEU6210GK-EAEx | 618  | 867  | 549  | 792  | 549  | 895 | 483 | 484 | 48   | 3,5 | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNEU6212GK-EAEx | 717  | 1039 | 636  | 949  | 682  | 895 | 483 | 484 | 49   | 4   | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNEU6215GK-EAEx | 948  | 1260 | 843  | 1152 | 1063 | 895 | 483 | 484 | 50   | 5   | 1 | 840  | 2,3 | 1/2 | 3/8 |
| UDNEU6220GK-EAEx | 1055 | 1524 | 948  | 1411 | 1115 | 895 | 483 | 484 | 57,5 | 6,2 | 1 | 840  | 2,3 | 1/2 | 3/8 |
| UDNT6222GK-EAEx  | 1184 | 1841 | 1217 | 1765 | 1288 | 895 | 483 | 484 | 58,5 | 6,3 | 1 | 840  | 2,3 | 1/2 | 3/8 |
| UDNT6224GK-EAEx  | 1403 | 2175 | 1442 | 2085 | 1465 | 895 | 483 | 484 | 58,5 | 6,7 | 1 | 1450 | 2,3 | 1/2 | 3/8 |
| UDNT6226GK-EAEx  | 1512 | 2267 | 1555 | 2176 | 1734 | 895 | 483 | 484 | 58,5 | 7,5 | 1 | 1450 | 2,3 | 1/2 | 3/8 |
| UDNJ9232GK-EAEx  | 1798 | 2633 | 1743 | 2624 | 1803 | 895 | 483 | 484 | 65   | 7,6 | 1 | 1300 | 2,3 | 5/8 | 1/2 |
| UDNTU6238GK-EAEx | 1970 | 2902 | 2026 | 2787 | 1951 | 895 | 483 | 484 | 65,5 | 12  | 1 | 1300 | 2,3 | 5/8 | 1/2 |

### Compressor 400V-3ph-50Hz - Fan 230V-1ph-50Hz

|                  |      |      |      |      |      |     |     |     |     |     |   |      |     |     |     |
|------------------|------|------|------|------|------|-----|-----|-----|-----|-----|---|------|-----|-----|-----|
| UDNJX6250GS-EAEx | 2935 | 4192 | 2742 | 4082 | 2774 | 895 | 621 | 613 | 92  | 3,4 | 1 | 2750 | 3,9 | 5/8 | 1/2 |
| UDSE6015GS-EAEx  | 3191 | 4586 | 3159 | 4533 | 2746 | 895 | 621 | 613 | 100 | 4,4 | 1 | 2750 | 3,9 | 7/8 | 1/2 |
| UDSE6018GS-EAEx  | 3376 | 4849 | 3353 | 4813 | 3223 | 895 | 621 | 613 | 100 | 5,9 | 1 | 2750 | 3,9 | 7/8 | 1/2 |
| UDSE6021GS-EAEx  | 4154 | 5866 | 4135 | 5849 | 3645 | 895 | 621 | 613 | 100 | 6,1 | 1 | 2750 | 3,9 | 7/8 | 1/2 |

| MEDIUM TEMPERATURE<br>CONDENSING UNITS<br>MODELS | R134a                             |     | R513A                             |     | Max Power input<br>(W)<br>+10°C | Dimensions<br>(mm) |   |   | Weight<br>Net<br>(kg) | Inom<br>(A) | Fan                 |                                | Liquid<br>receiver<br>dm <sup>3</sup> | Connection<br>diameters |               |
|--|-----------------------------------|-----|-----------------------------------|-----|---------------------------------|--------------------|---|---|-----------------------|-------------|---------------------|--------------------------------|---------------------------------------|-------------------------|---------------|
|  | Cooling capacity<br>(W)<br>@+32°C |     | Cooling capacity<br>(W)<br>@+32°C |     |                                 | W                  | D | H |                       |             | Number<br>of fan(s) | Airflow<br>(m <sup>3</sup> /h) |                                       | Suction<br>(")          | Liquid<br>(") |
|  | -10°C                             | 0°C | -10°C                             | 0°C |                                 |                    |   |   |                       |             |                     |                                |                                       |                         |               |

### Compressor 230V-1ph-50Hz - Fan 230V-1ph-50Hz

|                 |      |      |      |      |      |     |     |     |      |      |   |      |     |     |     |
|-----------------|------|------|------|------|------|-----|-----|-----|------|------|---|------|-----|-----|-----|
| UDNEU6210Z-EAEx | 625  | 958  | 659  | 979  | 537  | 895 | 483 | 484 | 50   | 3,7  | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNEU6212Z-EAEx | 689  | 1016 | 727  | 1038 | 691  | 895 | 483 | 484 | 57,5 | 4,2  | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNEU6214Z-EAEx | 794  | 1171 | 838  | 1196 | 820  | 895 | 483 | 484 | 58,5 | 4,9  | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNT6215Z-EAEx  | 790  | 1175 | 830  | 1196 | 726  | 895 | 483 | 484 | 58,5 | 4,8  | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNT6217Z-EAEx  | 944  | 1418 | 993  | 1444 | 833  | 895 | 483 | 484 | 58,5 | 4,52 | 1 | 840  | 2,3 | 1/2 | 3/8 |
| UDNJ6220Z-EAEx  | 1177 | 1780 | 1225 | 1812 | 1150 | 895 | 483 | 484 | 65   | 7,5  | 1 | 1450 | 2,3 | 1/2 | 3/8 |
| UDNJ6226Z-EAEx  | 1464 | 2132 | 1525 | 2170 | 1458 | 895 | 483 | 484 | 65,5 | 7,6  | 1 | 1450 | 2,3 | 1/2 | 3/8 |

### Compressor 400V-3ph-50Hz - Fan 230V-1ph-50Hz

|                 |      |      |      |      |      |     |     |     |     |     |   |      |     |     |     |
|-----------------|------|------|------|------|------|-----|-----|-----|-----|-----|---|------|-----|-----|-----|
| UDSE6015GS-EAEx | 2041 | 3128 | 2146 | 3229 | 1582 | 895 | 621 | 613 | 100 | 4,4 | 1 | 2750 | 3,9 | 7/8 | 1/2 |
| UDSE6018GS-EAEx | 2400 | 3664 | 2514 | 3767 | 1810 | 895 | 621 | 613 | 100 | 5,9 | 1 | 2750 | 3,9 | 7/8 | 1/2 |
| UDSE6021GS-EAEx | 2699 | 4105 | 2819 | 4206 | 2032 | 895 | 621 | 613 | 100 | 6,1 | 1 | 2750 | 3,9 | 7/8 | 1/2 |

| LOW TEMPERATURE<br>CONDENSING UNITS<br>MODELS | R452A                             |       | R449A                             |       | Max Power input<br>(W)<br>+10°C | Dimensions<br>(mm) |   |   | Weight<br>Net<br>(kg) | Inom<br>(A) | Fan                 |                                | Liquid<br>receiver<br>dm <sup>3</sup> | Connection<br>diameters |               |
|---|-----------------------------------|-------|-----------------------------------|-------|---------------------------------|--------------------|---|---|-----------------------|-------------|---------------------|--------------------------------|---------------------------------------|-------------------------|---------------|
|   | Cooling capacity<br>(W)<br>@+32°C |       | Cooling capacity<br>(W)<br>@+32°C |       |                                 | W                  | D | H |                       |             | Number<br>of fan(s) | Airflow<br>(m <sup>3</sup> /h) |                                       | Suction<br>(")          | Liquid<br>(") |
|   | -35°C                             | -30°C | -35°C                             | -30°C |                                 |                    |   |   |                       |             |                     |                                |                                       |                         |               |

### Compressor 230V-1ph-50Hz - Fan 230V-1ph-50Hz

|                  |     |     |   |   |      |     |     |     |      |      |   |      |     |     |     |
|------------------|-----|-----|---|---|------|-----|-----|-----|------|------|---|------|-----|-----|-----|
| UDNEU2155GK-EAEx | 231 | 322 | - | - | 649  | 895 | 483 | 484 | 48   | 4    | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNEU2168GK-EAEx | 294 | 395 | - | - | 715  | 895 | 483 | 484 | 49   | 4,6  | 1 | 840  | 1,1 | 3/8 | 1/4 |
| UDNT2180GK-EAEx  | 386 | 483 | - | - | 1006 | 895 | 483 | 484 | 52   | 6,4  | 1 | 840  | 2,3 | 1/2 | 3/8 |
| UDNT2192GK-EAEx  | 443 | 565 | - | - | 1048 | 895 | 483 | 484 | 58,5 | 6,3  | 1 | 840  | 2,3 | 1/2 | 3/8 |
| UDNT2212GK-EAEx  | 520 | 661 | - | - | 1359 | 895 | 483 | 484 | 58,5 | 7,04 | 1 | 1450 | 2,3 | 1/2 | 3/8 |
| UDNJ2212GK-EAEx  | 588 | 779 | - | - | 1746 | 895 | 483 | 484 | 59   | 8,9  | 1 | 1450 | 2,3 | 1/2 | 3/8 |

### Compressor 400V-3ph-50Hz - Fan 230V-1ph-50Hz

|                  |      |      |      |      |      |     |     |     |     |     |   |      |     |     |     |
|------------------|------|------|------|------|------|-----|-----|-----|-----|-----|---|------|-----|-----|-----|
| UDNJX2219GS-EAEx | 800  | 1049 | -    | -    | 2053 | 895 | 621 | 613 | 92  | 2,3 | 1 | 2750 | 3,9 | 5/8 | 1/2 |
| UDSE2006GS-EAEx  | 1177 | 1472 | 1151 | 1458 | 1726 | 895 | 621 | 613 | 100 | 3,5 | 1 | 2750 | 3,9 | 7/8 | 1/2 |
| UDSE2008GS-EAEx  | 1488 | 1850 | 1373 | 1705 | 2203 | 895 | 621 | 613 | 100 | 3,9 | 1 | 2750 | 3,9 | 7/8 | 1/2 |




## for any size the right solutions

### STANDARD EXECUTIONS



*Without receiver  
and without valves*

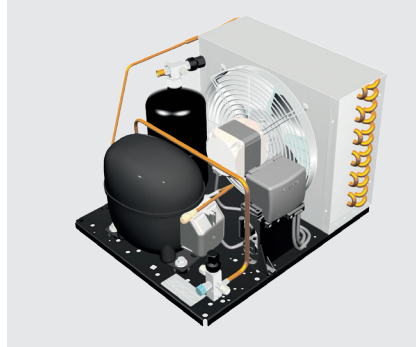


*With receiver and valves*



*With receiver, valves  
and liquid line*

### CUSTOM EXECUTIONS

*Customized versions can also be developed  
according to the customer's needs*

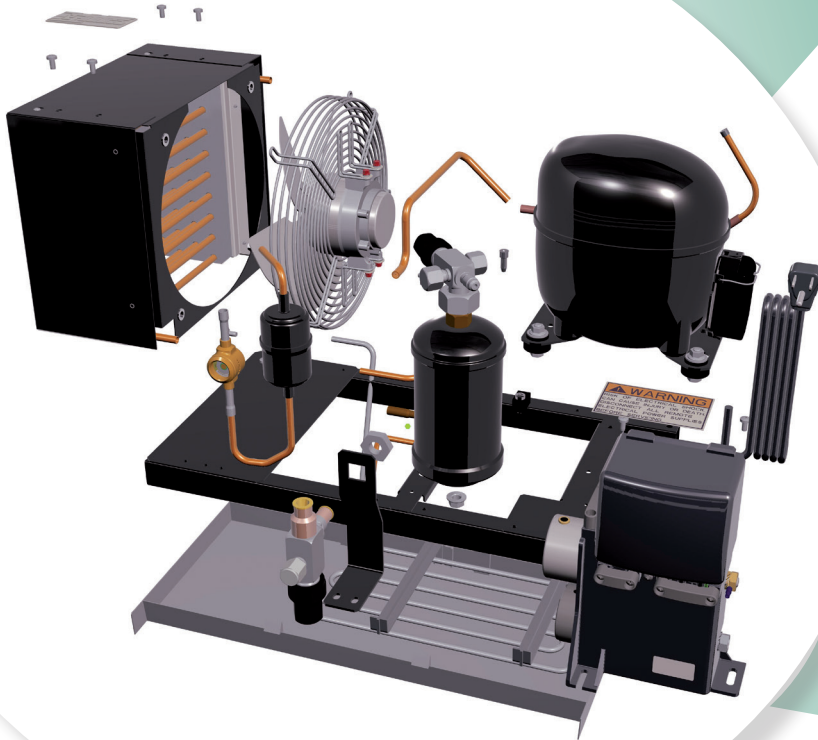



## EMEA • CONDENSING UNITS LINE UP



|                             | EM          | NEU       | NT      | NJ(X)   | SCROLL   |
|-----------------------------|-------------|-----------|---------|---------|----------|
| <b>HP</b>                   | 1/8 - 1/3   | 1/3 - 3/4 | 1/2 - 1 | 1 - 2   | 2 - 13   |
| <b>Displacement (cc)</b>    | 1 - 11      | 6 - 17    | 13 - 28 | 21 - 38 | 33 - 197 |
| <b>MBP</b>                  | R452A       | ■         | ■       | ■       | ■        |
|                             | R449A/R448A | ■         | ■       | ■       | ■        |
|                             | R513A       | ■         | ■       | ■       | ■        |
| <b>LBP</b>                  | R452A       | ■         | ■       | ■       | ■        |
|                             | R449A/R448A |           |         |         | ■        |
| <b>Ecodesign approved</b>   | ■           | ■         | ■       | ■       | ■        |
| <b>Ambient temperature*</b> | +43°C       | +43°C     | +43°C   | +43°C   | +43°C    |

\* All Embraco Condensing Units are tested for tropical temperatures up to 43°C

## MODELS AND PERFORMANCE LOW TEMPERATURE (LBP)

| CONDENSING UNITS MODELS  | Compressors |      | Cooling capacity (kW) RGT20* @+32°C |       |       | Max Power input (kW) | Dimensions (mm)** |     |      | Weight | MCC (A) | Fan      |                | Liquid receiver (dm <sup>3</sup> ) | Connection diameters        |             |
|--|-------------|------|-------------------------------------|-------|-------|----------------------|-------------------|-----|------|--------|---------|----------|----------------|------------------------------------|-----------------------------|-------------|
|  | Displ. (cc) | HP   | -35°C                               | -35°C | +10°C |                      | W                 | D   | H    |        |         | Net (kg) | Number of fans |                                    | Airflow (m <sup>3</sup> /h) | Suction (") |
|  |             |      |                                     |       |       | R449A                |                   |     |      | R452A  |         |          |                |                                    |                             |             |
| <b>Compressor 230V-1ph-50Hz - Fan 230V-1ph-50Hz</b>                  |             |      |                                     |       |       |                      |                   |     |      |        |         |          |                |                                    |                             |             |
| UEMT2117GK   | 4,5         | 1/4  | -                                   | 0,14  | 0,1   | 290                  | 430               | 226 | 17,1 | 1,4    | 1       | 300      | 0,5            | 3/8"                               | 1/4"                        |             |
| UEMT2121GK   | 5,2         | 1/3  | -                                   | 0,18  | 0,17  | 290                  | 430               | 226 | 20   | 1,46   | 1       | 300      | 0,5            | 3/8"                               | 1/4"                        |             |
| UEMT2125GK   | 6,0         | 1/3+ | -                                   | 0,20  | 0,20  | 435                  | 308               | 254 | 15,4 | 1,2    | 1       | 420      | 1,1            | 3/8"                               | 1/4"                        |             |
| UEMT2130GK   | 6,8         | 1/2- | -                                   | 0,22  | 0,23  | 300                  | 435               | 254 | 15,4 | 2,5    | 1       | 420      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU2140GK   | 8,8         | 1/2  | -                                   | 0,25  | 0,75  | 340                  | 475               | 296 | 20,9 | 3,05   | 1       | 595      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU2155GK   | 12,1        | 3/4  | -                                   | 0,32  | 0,37  | 340                  | 475               | 296 | 22,2 | 4,21   | 1       | 595      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU2168GK   | 14,3        | 3/4  | -                                   | 0,10  | 0,42  | 340                  | 502               | 296 | 23   | 4,8    | 1       | 460      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNT2178GK  | 17,4        | 1-   | -                                   | 0,44  | 0,46  | 340                  | 494               | 296 | 27,7 | 4,24   | 1       | 460      | 1,2            | 3/8"                               | 1/4"                        |             |
| UNT2180GK  | 20,4        | 1    | -                                   | 0,55  | 0,55  | 340                  | 494               | 296 | 28,6 | 5,8    | 1       | 460      | 1,2            | 3/8"                               | 1/4"                        |             |
| UNT2192GK  | 22,4        | 1+   | -                                   | 0,59  | 0,59  | 395                  | 500               | 324 | 32,8 | 5,5    | 1       | 800      | 2,3            | 3/8"                               | 3/8"                        |             |
| UNT2210GK  | 26,2        | 1,25 | -                                   | 0,69  | 0,71  | 395                  | 494               | 324 | 34,6 | 7,18   | 1       | 800      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNT2212GK  | 27,8        | 1,5  | -                                   | 0,40  | 0,73  | 395                  | 500               | 324 | 36   | 5,25   | 1       | 800      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNJ2192GK  | 26,1        | 1,25 | -                                   | 0,65  | 0,70  | 404                  | 505               | 324 | 35,3 | 4,75   | 1       | 800      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNJ2212GK  | 34,4        | 1,5  | -                                   | 0,83  | 0,81  | 404                  | 505               | 324 | 37,9 | 6,5    | 1       | 800      | 2,3            | 5/8"                               | 3/8"                        |             |
| <b>Compressor 400V-3ph-50Hz - Fan 230V-1ph-50Hz or 400V-3ph-50Hz</b> |             |      |                                     |       |       |                      |                   |     |      |        |         |          |                |                                    |                             |             |
| UNJ2212GS  | 34,4        | 1,5  | -                                   | 0,85  | 0,72  | 405                  | 505               | 324 | 36,5 | 2,38   | 1       | 800      | 2,3            | 5/8"                               | 3/8"                        |             |
| UNJX2219GS   | 38          | 2    | -                                   | 1,15  | 1,21  | 612                  | 657               | 494 | 45   | -      | 1       | 3200     | 3,9            | 1/2"                               | 3/8"                        |             |
| USE2006GS  | -           | 2    | 1,2                                 | 1,28  | 1,34  | 612                  | 657               | 494 | 57   | 3,5    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |
| USE2008GS  | -           | 2,5  | 1,51                                | 1,62  | 1,66  | 612                  | 657               | 494 | 57   | 3,9    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |

## MODELS AND PERFORMANCE MEDIUM TEMPERATURE (MBP)

| CONDENSING UNITS MODELS  | Compressors |      | Cooling capacity (kW) RGT20* @+32°C |       |       | Max Power input (kW) | Dimensions (mm)** |     |      | Weight | MCC (A) | Fan      |                | Liquid receiver (dm <sup>3</sup> ) | Connection diameters        |             |
|--|-------------|------|-------------------------------------|-------|-------|----------------------|-------------------|-----|------|--------|---------|----------|----------------|------------------------------------|-----------------------------|-------------|
|  | Displ. (cc) | HP   | -10°C                               | -10°C | +10°C |                      | W                 | D   | H    |        |         | Net (kg) | Number of fans |                                    | Airflow (m <sup>3</sup> /h) | Suction (") |
|  |             |      |                                     |       |       | R449A                |                   |     |      | R452A  |         |          |                |                                    |                             |             |
| <b>Compressor 230V-1ph-50Hz - Fan 230V-1ph-50Hz</b>                  |             |      |                                     |       |       |                      |                   |     |      |        |         |          |                |                                    |                             |             |
| UEMT6144GK   | 4           | 1/4- | -                                   | 0,38  | 0,21  | 302                  | 480               | 226 | 16,6 | 1,68   | 1       | 300      | 0,6            | 3/8"                               | 1/4"                        |             |
| UEMT6152GK   | 4,5         | 1/4  | -                                   | 0,4   | 0,24  | 302                  | 480               | 226 | 16,6 | 1,94   | 1       | 300      | 0,6            | 3/8"                               | 1/4"                        |             |
| UEMT6165GK   | 5,5         | 1/3  | 0,45                                | 0,49  | 0,29  | 302                  | 480               | 254 | 17,3 | 2,32   | 1       | 420      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU6210GK   | 7,3         | 1/3  | 0,61                                | 0,69  | 0,4   | 340                  | 475               | 296 | 21   | 3,11   | 1       | 595      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU6212GK   | 8,8         | 1/2  | 0,73                                | 0,82  | 0,49  | 340                  | 465               | 296 | 20,1 | 4,25   | 1       | 595      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU6215GK   | 12,1        | 1/2  | 1                                   | 1,13  | 0,67  | 395                  | 480               | 324 | 29   | 5,23   | 1       | 640      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU6220GK   | 14,3        | 3/4  | 1,18                                | 1,32  | 0,76  | 398                  | 471               | 323 | 25,3 | 5,55   | 1       | 640      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNT6220GK  | 14,5        | 3/4  | 1,47                                | 1,24  | 0,71  | 395                  | 500               | 324 | 32,3 | 5,15   | 1       | 640      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNT6222GK  | 17,4        | 3/4  | 1,32                                | 1,43  | 0,85  | 395                  | 500               | 324 | 32,5 | 7,73   | 1       | 640      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNT6224GK  | 20,4        | 1    | UD                                  | UD    | UD    | UD                   | UD                | UD  | UD   | UD     | UD      | UD       | UD             | UD                                 | UD                          |             |
| UNT6226GK  | 22,4        | 1+   | 1,71                                | 1,85  | 1,04  | 405                  | 485               | 372 | 33,6 | 7,27   | 1       | 700      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNJ9232GK  | 26,1        | 1,25 | 1,9                                 | 2,05  | 1,25  | 440                  | 600               | 372 | 41,5 | 8,12   | 1       | 1450     | 3,9            | 5/8"                               | 3/8"                        |             |
| UNJ9238GK  | 32,7        | 1,5  | 2,29                                | 2,47  | 1,58  | 440                  | 600               | 372 | 43   | 10,1   | 1       | 1300     | 3,9            | 5/8"                               | 3/8"                        |             |
| <b>Compressor 400V-3ph-50Hz - Fan 230V-1ph-50Hz or 400V-3ph-50Hz</b> |             |      |                                     |       |       |                      |                   |     |      |        |         |          |                |                                    |                             |             |
| UNJ9232GS  | 26,1        | 1,25 | 1,95                                | 2,1   | 1,17  | 440                  | 600               | 372 | 39,7 | 3,35   | 1       | 1450     | 3,9            | 5/8"                               | 3/8"                        |             |
| UNJ9238GS  | 32,7        | 1,5  | 2,26                                | 2,55  | 1,61  | 440                  | 600               | 372 | 42   | 4,49   | 1       | 1300     | 3,9            | 5/8"                               | 3/8"                        |             |
| UNJX6250GS   | 38          | 2    | 3,11                                | 3,35  | 1,99  | 612                  | 657               | 494 | 45   | 3,4    | 1       | 3200     | 3,9            | 1/2"                               | 3/8"                        |             |
| USE6015GS  | -           | 2    | 3,6                                 | 3,61  | 2,1   | 612                  | 657               | 494 | 56   | 4,4    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |
| USE6018GS  | -           | 2,5  | 4,2                                 | 4,2   | 2,4   | 612                  | 657               | 494 | 57   | 5,9    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |
| USE6021GS  | -           | 3    | 4,69                                | 4,68  | 2,68  | 612                  | 657               | 494 | 57   | 6,1    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |

| CONDENSING UNITS MODELS  | Compressors |      | Cooling capacity (kW) RGT20* @+32°C |       |       | Max Power input (kW) | Dimensions (mm)** |     |      | Weight | MCC (A) | Fan      |                | Liquid receiver (dm <sup>3</sup> ) | Connection diameters        |             |
|--|-------------|------|-------------------------------------|-------|-------|----------------------|-------------------|-----|------|--------|---------|----------|----------------|------------------------------------|-----------------------------|-------------|
|  | Displ. (cc) | HP   | -10°C                               | -10°C | +10°C |                      | W                 | D   | H    |        |         | Net (kg) | Number of fans |                                    | Airflow (m <sup>3</sup> /h) | Suction (") |
|  |             |      |                                     |       |       | R513A                |                   |     |      | R134a  |         |          |                |                                    |                             |             |
| <b>Compressor 230V-1ph-50Hz - Fan 230V-1ph-50Hz</b>                  |             |      |                                     |       |       |                      |                   |     |      |        |         |          |                |                                    |                             |             |
| UEMT37HDP  | 3,4         |      | -                                   | 195   | 130   | 290                  | 431               | 226 | 13,5 | 1,2    | 1       | 300      | 0,6            | 3/8"                               | 1/4"                        |             |
| UEMT45HDR  | 4           | 1/7  | -                                   | 227   | 147   | 302                  | 480               | 226 | 16   | 1,24   | 1       | 300      | 0,6            | 3/8"                               | 1/4"                        |             |
| UEMT50HDP  | 4,5         | 1/6  | -                                   | 250   | 155   | 290                  | 431               | 226 | 12,6 | 1,3    | 1       | 300      | 0,6            | 3/8"                               | 1/4"                        |             |
| UEMT6144Z  | 5,2         | 1/5  | -                                   | 291   | 178   | 302                  | 480               | 226 | 16,6 | 1,68   | 1       | 300      | 0,6            | 3/8"                               | 1/4"                        |             |
| UEMT6160Z  | 6,8         | 1/4  | -                                   | 388   | 229   | 302                  | 480               | 254 | 19   | 1,87   | 1       | 420      | 1,1            | 3/8"                               | 1/4"                        |             |
| UEMT6170Z  | 7,7         | 1/3- | -                                   | 433   | 261   | 302                  | 480               | 254 | 17,4 | 2,13   | 1       | 420      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU6187Z  | 10          | 1/3  | 667                                 | 631   | 381   | 340                  | 475               | 296 | 22,1 | 7,64   | 1       | 660      | 1              | 3/8"                               | 1/4"                        |             |
| UNEU6210Z  | 12,1        | 1/2  | 670                                 | 634   | 393   | 340                  | 475               | 296 | 21   | 2,83   | 1       | 595      | 1,1            | 3/8"                               | 1/4"                        |             |
| UNEU6212Z  | 14,3        | 1/2  | 898                                 | 851   | 550   | 340                  | 475               | 296 | 22,1 | 8,74   | 1       | 660      | 1              | 3/8"                               | 1/4"                        |             |
| UNEU6214Z  | 16,8        | 1/2  | 987                                 | 934   | 594   | 340                  | 502               | 296 | 22,1 | 5,36   | 1       | 660      | 1              | 3/8"                               | 1/4"                        |             |
| UNT6215Z   | 17,4        | 1/2+ | 1049                                | 998   | 632   | 398                  | 477               | 296 | 26,2 | 4,9    | 1       | 930      | 1              | 3/8"                               | 1/4"                        |             |
| UNT6217Z   | 20,4        | 3/4+ | 1073                                | 1021  | 611   | 395                  | 471               | 323 | 31,8 | 5,43   | 1       | 640      | 2,3            | 3/8"                               | 3/8"                        |             |
| UNT6220Z   | 22,4        | 1    | 1328                                | 1264  | 822   | 395                  | 471               | 323 | 26,8 | 9,15   | 1       | 720      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNJ6220Z   | 26,1        | 1    | 1303                                | 1252  | 765   | 404                  | 505               | 324 | 35,4 | 6,45   | 1       | 640      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNJ6226Z   | 34,4        | 1,25 | 1599                                | 1536  | 907   | 404                  | 505               | 324 | 35,6 | 6,75   | 1       | 640      | 2,3            | 5/8"                               | 3/8"                        |             |
| <b>Compressor 400V-3ph-50Hz - Fan 230V-1ph-50Hz or 400V-3ph-50Hz</b> |             |      |                                     |       |       |                      |                   |     |      |        |         |          |                |                                    |                             |             |
| UNJ6220ZX  | 26,1        | 1    | 1311                                | 1260  | 723   | 409                  | 481               | 324 | 35,7 | 2,13   | 1       | 640      | 2,3            | 1/2"                               | 3/8"                        |             |
| UNJ6226ZX  | 36,4        | 1,25 | 1630                                | 1566  | 884   | 410                  | 481               | 324 | 36,5 | 2,4    | 1       | 640      | 2,3            | 5/8"                               | 3/8"                        |             |
| UNJX6232ZX   | 38          | 2    | UD                                  | UD    | UD    | UD                   | UD                | UD  | UD   | UD     | UD      | UD       | UD             | UD                                 | UD                          |             |
| USE6015GS  | -           | 2    | 2376                                | 2237  | 1267  | 612                  | 657               | 494 | 56   | 4,4    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |
| USE6018GS  | -           | 2,5  | 2785                                | 2631  | 1429  | 612                  | 657               | 494 | 57   | 5,9    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |
| USE6021GS  | -           | 3    | 3123                                | 2958  | 1575  | 612                  | 657               | 494 | 57   | 6,1    | 1       | 3200     | 3,9            | 7/8"                               | 3/8"                        |             |

\*Performances according to EN13215 - RGT20 - Subcooling 3K

\*\*Dimensions may change according to the configuration, please contact your Embraco representative

UD means Under Development



embraco  
*Nidec*

[www.embraco.com](http://www.embraco.com)