

## Infographic

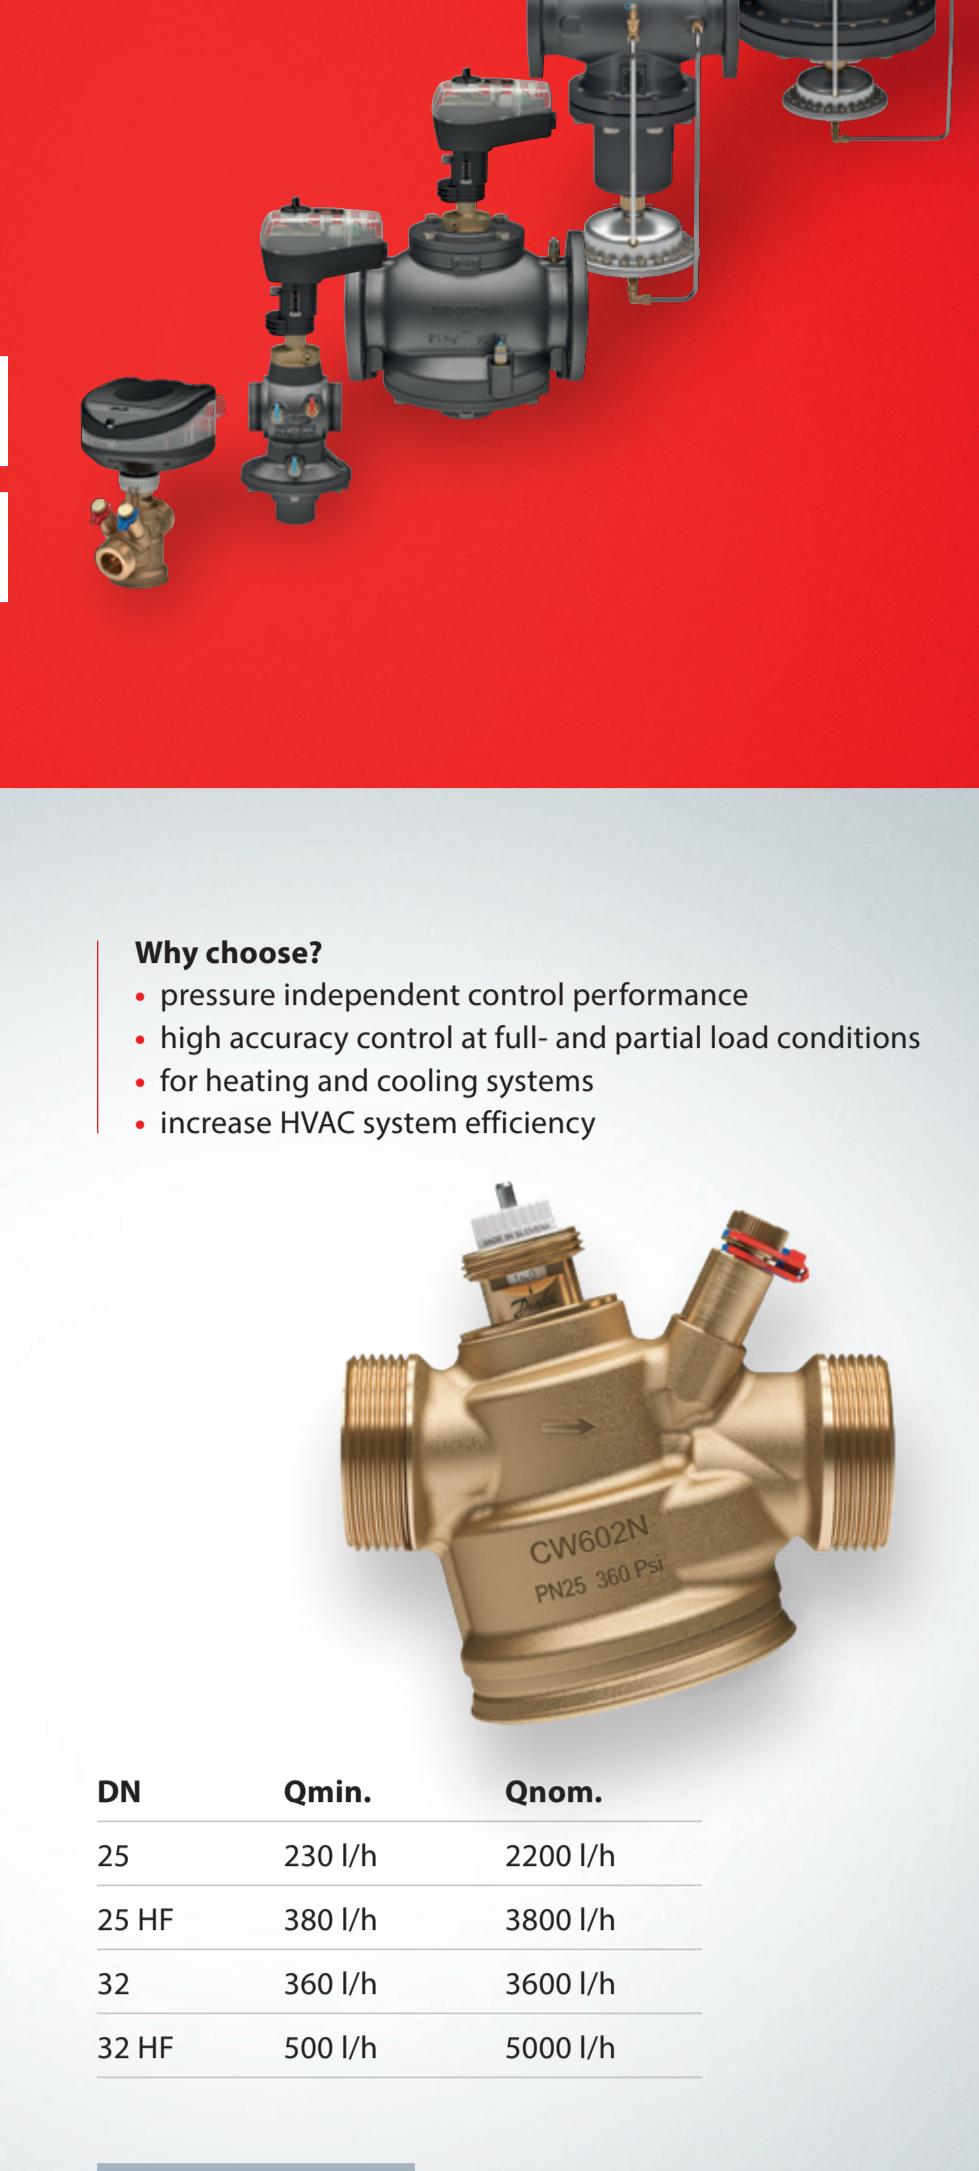
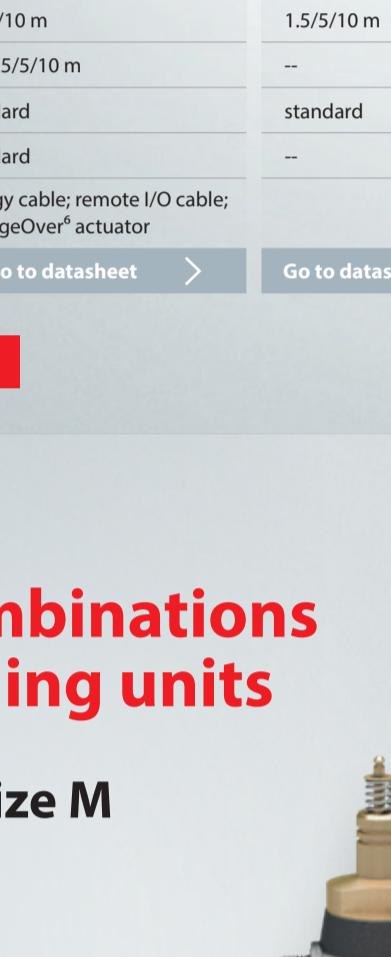
**Actuator selection for PICVs**An interactive selection for all  
Danfoss AB-QM PICV valves

Pressure Independent Control Valves (PICVs) are commonly used for hydronic balancing and precise temperature control in HVAC heating and cooling systems. The control accuracy, controllers to be used, project price and many more aspects are mostly determined by the selection of the PICV actuator.

There are many actuators that fit the Danfoss AB-QM series of PICV valves. This interactive infographic helps you find the best suited actuator for your projects.

Continue by clicking the buttons below:

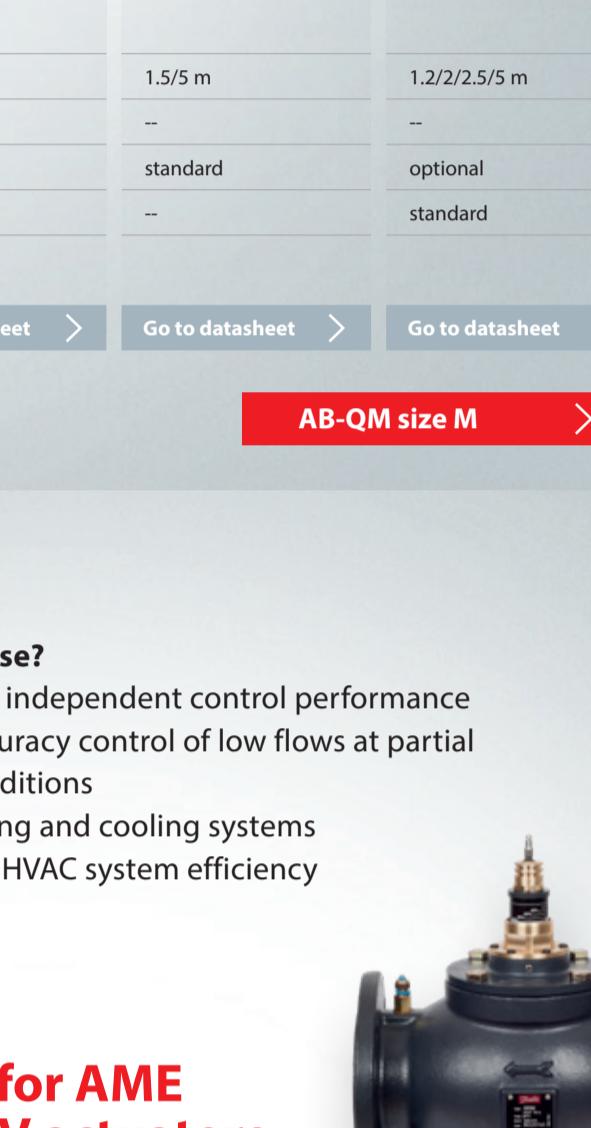
<b>Small combinations</b> DN 15 - DN 32	>	<b>Large combinations</b> DN 125 - DN 150	>
<b>Medium combinations</b> DN 40 - DN 100	>	<b>X-large combinations</b> DN 200 - DN 250	>

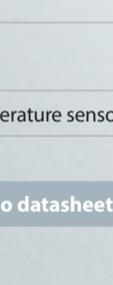
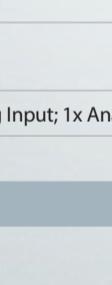
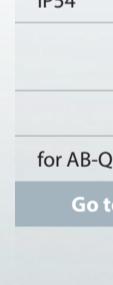
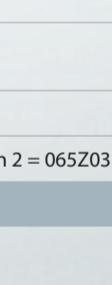
**Small combinations  
for terminal units****AB-QM valves size S****AB-QM 4.0**

DN	Qmin.	Qnom.
15 LF	20 l/h	200 l/h
15	65 l/h	650 l/h
15 HF	120 l/h	1200 l/h
20	110 l/h	1100 l/h
20 HF	190 l/h	1900 l/h

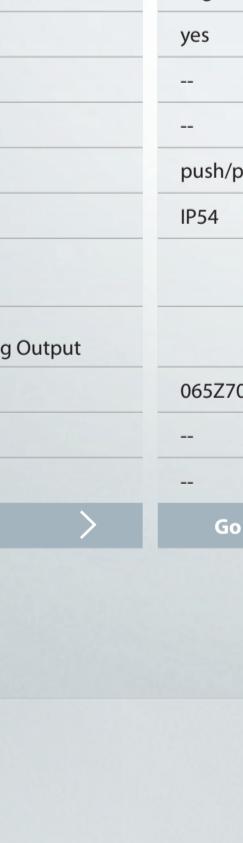
[Go to datasheet >](#)**Why choose?**

- pressure independent control performance
- high accuracy control at full- and partial load conditions
- for heating and cooling systems
- increase HVAC system efficiency

**Actuators size S - specifications**

Control principle	Digital	Modulating / Floating		On/off	
	Step motor	Gear	Thermal	Gear	Thermal
Actuator principle	Step motor	• connectivity & data • BMS integration • high accuracy • remote possibilities	• high quality	• low noise operation	• high quality • speed
Why choose?	Step motor	• high quality • high quality	• high quality	• low noise operation	• low-price • PWM • complete series
Actuator	NovoCon® S	AME 110/120 NL(X)	AMV 110/120 NL	ABNM A5	AMI 140
					
Specification summary					
Control signals	BACnet; Modbus; 0-10V; 4-20mA	0-10V; 4-20mA	3-point	0-10V	on-off 24/230V AC
Power supply	24V AC/DC	24V AC	24V AC/DC	24/230V AC	24/230V AC/DC
Feedback signal	BACnet; Modbus	x-signal	--	--	--
Speed	24/12/6/3 sec./mm	24/12 sec./mm	24/12 sec./mm	30 sec./mm	12 sec./mm
Characteristic	Logarithmic / Linear	Logarithmic / Linear	--	Logarithmic / Linear	--
Valve open/close detection	yes	yes	yes	yes	no
Cable	plug-in	standard	standard	plug-in	standard
Mounting adapter	--	--	--	V41 (incl.)	--
IP class	IP54	IP42	IP42	IP54	IP54
Options & accessories					
Power cable lengths	1.5/5/10 m	1.5/5/10 m	1.5/5/10 m	1/5/10 m	1.5/5 m
Daisy-chain cable length	0.5/1.5/5/10 m	--	--	--	--
Halogen free cables	standard	standard	standard	standard	optional
DC power supply	standard	--	--	optional	standard
Expand features	energy cable remote I/O cable; ChangeOver® actuator				

The overview shows the most common used actuators for AB-QM PICVs.  
For special needs or applications contact our local Sales representative.

[Back to front page >](#)[Actuators size S >](#)**Medium combinations  
for air handling units****AB-QM valves size M**

DN	Qmin.	Qnom.
40 (G 2A)	3 m³/h	7,5 m³/h
50 (G 2 1/2A)	5 m³/h	12,5 m³/h
50	5 m³/h	12,5 m³/h
65	8 m³/h	20 m³/h
65 HF	10 m³/h	25 m³/h
80	11,2 m³/h	28 m³/h
80 HF	16 m³/h	40 m³/h
100	15,2 m³/h	38 m³/h
100 HF	23,6 m³/h	59 m³/h


[Go to datasheet >](#)**Why choose?**

- pressure independent control performance
- high accuracy control of low flows at partial load conditions
- for heating and cooling systems
- increase HVAC system efficiency

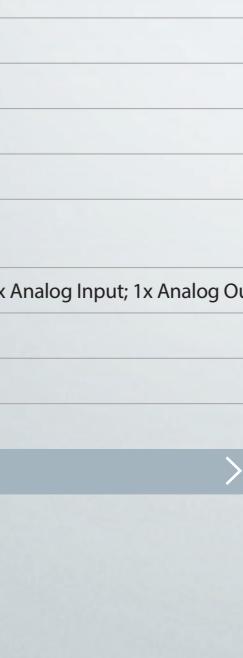
**AB-QM for AME  
and AMV actuators**

DN	Qmin.	Qnom.
40 (G 2A)	3 m³/h	7,5 m³/h
50 (G 2 1/2A)	5 m³/h	12,5 m³/h
50	5 m³/h	12,5 m³/h
65	8 m³/h	20 m³/h
65 HF	10 m³/h	25 m³/h
80	11,2 m³/h	28 m³/h
80 HF	16 m³/h	40 m³/h
100	15,2 m³/h	38 m³/h
100 HF	23,6 m³/h	59 m³/h

[Go to datasheet >](#)**Actuators size M - specifications**

Control principle	Digital	Modulating / Floating		On/off	
	Step motor	Gear	Thermal	Gear	Thermal
Actuator principle	Step motor	• connectivity & data • BMS integration • high accuracy • remote possibilities	• high quality	• low noise operation	• high quality • speed
Why choose?	Step motor	• high quality • high quality	• high quality	• low noise operation	• low-price • PWM • complete series
Actuator	NovoCon® M	AME 435 QM	AMV 435	AB-QM	TWA-Q
					
Specification summary					
Control signals	BACnet; Modbus; 0-10V; 4-20mA	0-10V; 4-20mA; 3-point	24V AC/DC	0-10V	on-off 24/230V AC
Power supply	24V AC/DC	24V AC	x-signal	24V AC/DC	24/230V AC
Feedback signal	BACnet; Modbus	--	15/7.5 sec./mm	--	--
Speed	24/12/6/3 sec./mm	24/12 sec./mm	Logarithmic / Linear	--	--
Characteristic	Logarithmic / Linear	Logarithmic / Linear	--	yes	--
Valve open/close detection	yes	yes	yes	--	--
Cable	--	--	--	push/pull	push/pull
Mounting adapter	--	--	--	--	IP54
Actuator connection	push/pull	push/pull	push/pull	push/pull	IP54
IP class	IP54	IP54	IP54	IP54	IP54
Options & accessories					
Expand features	3x Temperature sensors; 1x Analog Input; 1x Analog Output				
Stem heater	--	065Z7022	--	065Z7022	065Z7022
Spring return	Spring up / Spring down	--	--	--	Spring up / Spring down
UL certification	--	--	--	yes	yes

The overview shows the most common used actuators for AB-QM PICVs.  
For special needs or applications contact our local Sales representative.

[Back to front page >](#)[AB-QM size M >](#)**Large combinations  
for chillers****AB-QM valves size L**

DN	Qmin.	Qnom.
125	36 m³/h	90 m³/h
125 HF	44 m³/h	110 m³/h
150	58 m³/h	145 m³/h
150 HF	76 m³/h	190 m³/h

[Go to datasheet >](#)**Why choose?**

- pressure independent control performance
- high accuracy control of low flows at partial load conditions
- for heating and cooling systems
- increase HVAC system efficiency

**AB-QM for AME  
and AMV actuators**

DN	Qmin.	Qnom.
40 (G 2A)	3	