

NEU6217U



ENGINEERING CODE
863JA51

REFRIGERANT
R-290

POWER SUPPLY
220-240 V 50 Hz

APPLICATION
MBP

MOTOR TYPE
CSCR

STANDARD
ASHRAE

COOLING CAPACITY
1177 W

EFFICIENCY
2 W/W



DATA

GENERAL DATA

Model	NEU6217U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	3/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	11.03 Ω at 25°C
Run Winding Resistance	5.15 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	21 A
Rated Load Amperage (LMBP) at 50 Hz	3.8 A

MECHANICAL DATA

Displacement	14.28 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	11.6 Kg

ELECTRICAL COMPONENTS

Start Capacitor	88-108 µf/330 V
CSR CSIR BOX	Yes
Overload Protection	MST30AMK-3261

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
------------	-------

Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-6.7	1177	2	587	2.76	13.56

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	1105	2.56	431	2.02	10.68
-10	1307	2.73	479	2.22	12.83
-5	1628	3.30	493	2.26	15.88
0	1942	3.78	514	2.38	19.04

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-15	974	2.07	470	2.18	10.18
-10	1152	2.19	526	2.44	12.26
-5	1447	2.61	553	2.54	15.26
0	1731	2.92	594	2.71	18.37

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	999	1.76	567	2.68	11.67
-5	1266	2.11	600	2.81	14.59
0	1520	2.33	653	3.00	17.63

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

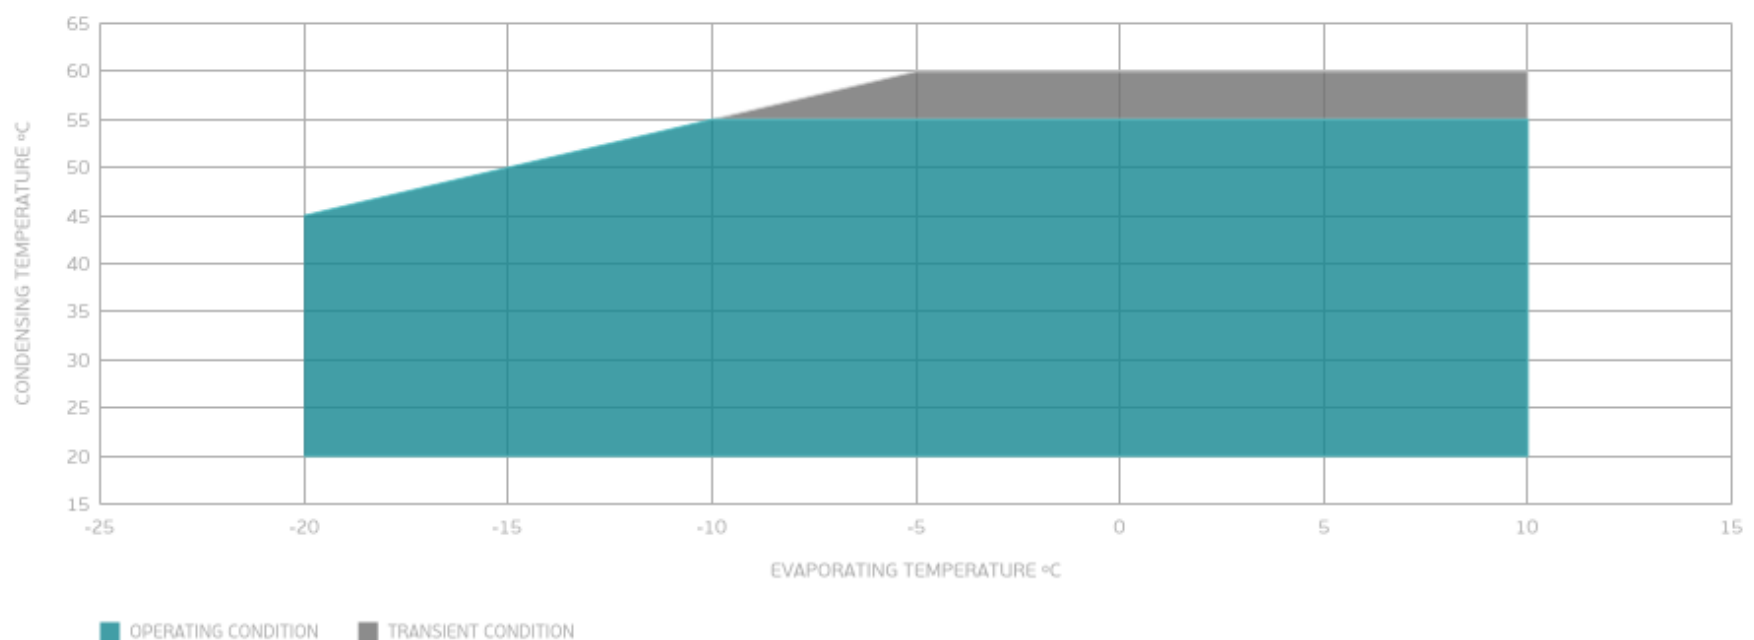

EXTERNAL DIMENSIONS

